



JFB Metric Flange Oiles Bearing

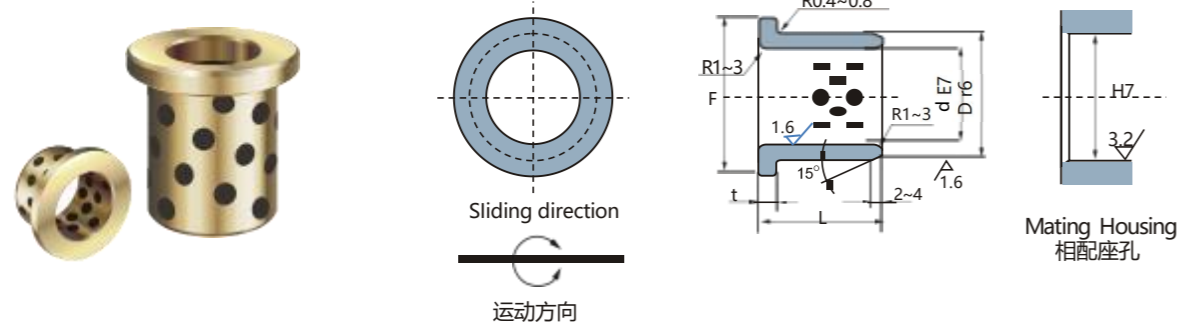

| I.D. ϕ d 内径 E7 | O.D. ϕ D 外径 r6 | Flange | | L ^{-0.1} _{-0.3} | | | | | | | | | | | | | | | |
|------------------------|------------------------|----------|------------------|-----------------------------------|-----------|------|------|------|------|------|------|------|------|--|--|--|------------------|------------------|------|
| | | ϕ F | t | 10 | 12 | 15 | 17 | 18 | 20 | 23 | | | | | | | | | |
| 6 | +0.032 +0.020 | 10 | +0.028 +0.019 | 16 | 2 | 0610 | 0612 | | | | | | | | | | | +0.016 +0.004 | 6 |
| 8 | +0.040 +0.025 | 12 | | 20 | 2 | 0810 | 0812 | 0815 | | | | | | | | | | +0.021 +0.006 | 8 |
| 10 | | 14 | +0.034 +0.023 | 22 | 2 | 1010 | 1012 | 1015 | 1017 | | | | 1020 | | | | | +0.031 +0.013 | 10 |
| 12 | | 18 | | 25 | 3 | 1210 | 1212 | 1215 | | | | 1220 | | | | | | | 12 |
| 13 | | 19 | | 26 | 3 | 1310 | 1312 | 1315 | | | | 1320 | | | | | | | 13 |
| 14 | +0.050 +0.032 | 20 | | 27 | 3 | | | 1415 | | | | 1420 | | | | | | | 14 |
| 15 | | 21 | +0.041 +0.028 | 28 | 3 | 1510 | 1512 | 1515 | | | | 1520 | | | | | | +0.026 +0.008 | 15 |
| 16 | | 22 | | 29 | 3 | | 1612 | 1615 | | 1618 | 1620 | 1623 | | | | | | | 16 |
| 18 | | 24 | | 32 | 5 | | | 1815 | | | 1820 | | | | | | | | 18 |
| 20 | | 30 | | 40 | 5 | | | 2015 | | | 2020 | | | | | | +0.037 +0.016 | | 20 |
| 25 | +0.061 +0.040 | 35 | | 45 | 5 | | | 2515 | | | 2520 | | | | | | +0.032 +0.011 | | 25 |
| 30 | | 40 | +0.050 +0.034 | 50 | 5 | | | | | | 3020 | | | | | | | | 30 |
| 31.5 | | | | | 5 | | | | | | 3120 | | | | | | | | 31.5 |
| 35 | | 45 | | 60 | 5 | | | | | | 3520 | | | | | | | | 35 |
| 40 | +0.075 +0.050 | 50 | | 65 | 5 | | | | | | 4020 | | | | | | | | 40 |
| 45 | | 55 | | 70 | 0 -0.1 | | | | | | | | | | | | | | 45 |
| 50 | | 60 | +0.060 +0.041 | 75 | 7.5 | | | | | | | | | | | | +0.040 +0.015 | | 50 |
| 55 | | 65 | | 80 | 7.5 | | | | | | | | | | | | +0.055 +0.025 | | 55 |
| 60 | | 75 | +0.062 +0.043 | 90 | 7.5 | | | | | | | | | | | | | | 60 |
| 63 | | | | 85 | 7.5 | | | | | | | | | | | | | | 63 |
| 65 | +0.090 +0.060 | 80 | | 95 | 7.5 | | | | | | | | | | | | | | 65 |
| 70 | | 85 | | 105 | 7.5 | | | | | | | | | | | | | | 70 |
| 75 | | 90 | +0.073 +0.051 | 110 | 7.5 | | | | | | | | | | | | | | 75 |
| 80 | | 100 | | 120 | 10 | | | | | | | | | | | | | | 80 |
| 90 | | 110 | +0.076 +0.054 | 130 | 10 | | | | | | | | | | | | | | 90 |
| 100 | +0.107 +0.072 | 120 | | 150 | 10 | | | | | | | | | | | | | | 100 |
| 120 | | 140 | +0.088 +0.063 | 170 | 10 | | | | | | | | | | | | | | 120 |
| 130 | | 150 | +0.090 +0.065 | 180 | 10 | | | | | | | | | | | | | | 130 |
| 140 | | 160 | | 190 | 10 | | | | | | | | | | | | | | 140 |
| 150 | +0.125 +0.085 | 170 | | 200 | 10 | | | | | | | | | | | | | | 150 |
| 160 | | 180 | +0.093 +0.068 | 210 | 10 | | | | | | | | | | | | | | 160 |

JFB Metric Flange Oiles Bearing

| | |
|----------|----------------------|
| Material | CuZn25Al5 + Graphite |
| 材质 | 高力黄铜 + 石墨 |



d8 : High load 高负荷
e7 : Light load 轻负荷
f7 : High precision 高精度

Unit(单位): mm

| L ^{-0.1} _{-0.3} | | | | | | | | | | I.D. After Press-Fitting 压装后内孔 | I.D. ϕ d 内径 |
|-----------------------------------|------|------|------|------|------|------|-------|--------|-----|-----------------------------------|---------------------|
| 25 | 30 | 35 | 40 | 50 | 60 | 67.5 | 80 | 100 | 120 | | |
| | | | | | | | | | | +0.016 +0.004 | 6 |
| | | | | | | | | | | +0.021 +0.006 | 8 |
| | | | | | | | | | | +0.031 +0.013 | 10 |
| 1225 | 1230 | | | | | | | | | | 12 |
| 1325 | 1330 | | | | | | | | | | 13 |
| 1425 | | | | | | | | | | | 14 |
| 1525 | 1530 | | | | | | | | | +0.026 +0.008 | 15 |
| 1625 | 1630 | 1635 | 1640 | | | | | | | | 16 |
| 1825 | 1830 | 1835 | 1840 | | | | | | | | 18 |
| 2025 | 2030 | 2035 | 2040 | | | | | | | +0.037 +0.016 | 20 |
| 2525 | 2530 | 2535 | 2540 | 2550 | | | | | | +0.032 +0.011 | 25 |
| 3025 | 3030 | 3035 | 3040 | 3050 | | | | | | | 30 |
| | 3130 | 3135 | 3140 | | | | | | | | 31.5 |
| 3525 | 3530 | 3535 | 3540 | 3550 | | | | | | +0.046 +0.021 | 35 |
| 4025 | 4030 | 4035 | 4040 | 4050 | | | | | | | 40 |
| | 4530 | 4535 | 4540 | 4550 | 4560 | | | | | +0.040 +0.015 | 45 |
| | 5030 | 5035 | 5040 | 5050 | 5060 | | | | | +0.055 +0.025 | 50 |
| | | | 5540 | | 5560 | | | | | | 55 |
| | | | 6040 | 6050 | 6060 | | 6080 | | | | 60 |
| | | | | | | | 6367 | | | +0.053 +0.023 | 63 |
| | | | | | | | | | | | 65 |
| | | | | 7050 | | | | | | | 70 |
| | | | | | 7560 | | 7080 | | | +0.046 +0.016 | 75 |
| | | | | | 8060 | | 8080 | 80100 | | | 80 |
| | | | | | 9060 | | 9080 | | | +0.060 +0.025 | 90 |
| | | | | | | | 10080 | 100100 | | | 100 |
| | | | | | | | | | | +0.052 +0.017 | 120 |
| | | | | | | | | | | | 130 |
| | | | | | | | | | | +0.068 +0.028 | 140 |
| | | | | | | | | | | | 150 |
| | | | | | | | | | | +0.065 +0.025 | 160 |

※压入后内孔公差值做参考。
The ID tolerance after fitting is for reference.